

SM351




Parking areas, entrances, walkways, underpasses, loading docks, recreation areas.

GENERAL SPECIFICATION


- UL listed for wet locations
- High impact polycarbonate lens and housing
- Corrosion Resistant
- One piece anodized aluminum designed reflector for best light efficiency
- Silicone rubber included to prevent any leakage from the outside
- 1/2" tapped holes available for installing photocell (photocell optional)
- Ideal for HPS 50 Watts and PL 2 X13 Watts Max

LINE DRAWING

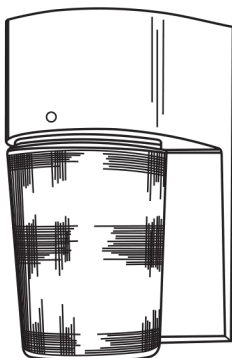

SURFACE MOUNT LIGHTING

DIMENSIONS

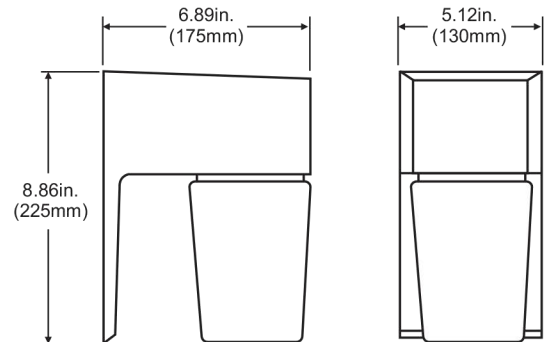

PHOTOCONTROL



ITEM NO.	LAMP	VOLTS	BALLAST
SM351-P213	2X13W/CFL		HX-HPF
SM351-S05	HPS50W/ED17/E-26	QUAD	HX-HPF

DDE Inc.

ddeonline.com
888-271-0644