

PREMIER GARAGE LED

LED-365

40LED

60LED




DDE Inc.

LED-365

40LED

60LED

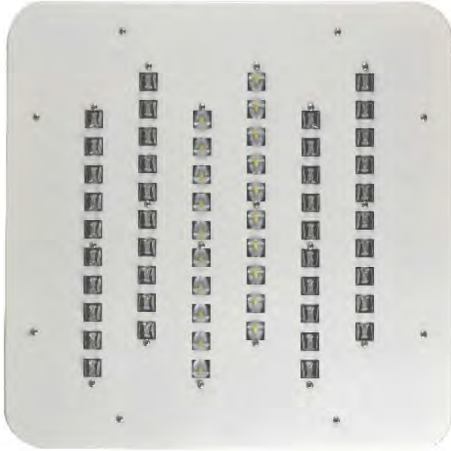

Canopy or garage lighting efficiency at its best. This ceiling mounted unit provides rugged die cast construction with LED directional performance and outlast anything on the market today. Designed by Grandlite to optimize the high performance, long life LED's, this fixture is the lighting choice for your customer when it comes to high performance, energy efficient garage lighting.

PREMIER GARAGE LED





Perfect for:

Garage application, gas station,
and high ceiling retail stores

Technical Specifications

- * Die cast aluminum housing
- * UV resistant powder coating finish
- * Input voltage: 120~277V AC / 50-60HZ
- * Low Tj for long life, low lumen depreciation
- * Low starting temp -40°C
- * Color temperature — 4700K
- * IP65
- * UL/CUL for wet location
- * Recess mounted available

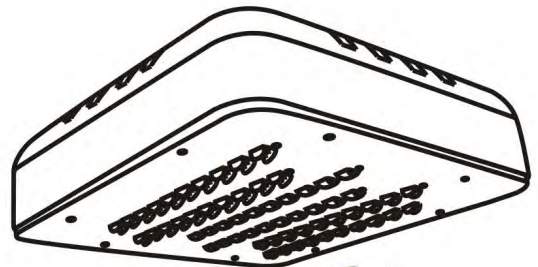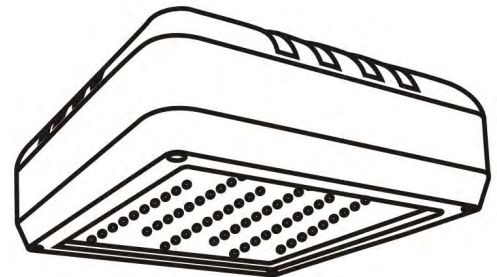

Powered by **CREE**™
LEDs

Specifications



Quick mounting plate for easy and quick installation



High transparency temper glass for maximum light output



Temper proof center-pin torque screw included/ meet new UL/CUL requirement



Occupancy sensor option is available Grandlite LED garage fixture

MODEL	# of LED	Description	Wattage	Occupancy Sensor	Battery
SML365	60	NO OPTIC	140W	Optional	Optional
SML365	60	OPTIC	140W	Optional	Optional
SML365/BILEVEL	60	NO OPTIC	140W	50% Dimming Capable	Optional
SML365/BILEVEL	60	OPTIC	140W	50% Dimming Capable	Optional
SML365	40	NO OPTIC	95W	Optional	Optional
SML365	40	OPTIC	95W	Optional	Optional
SML365/BILEVEL	40	NO OPTIC	95W	50% Dimming Capable	Optional
SML365/BILEVEL	40	OPTIC	95W	50% Dimming Capable	Optional

DIMENSIONS

