




SML-109




General area wall lighting made efficient. Rugged construction, long life construction quality throughout the product. Easily installs on junction boxes or direct mounts to the wall with feed thru conduit access. Frosted glass lens makes the most of the leds to widely distribute the highly efficient led output. High quality thermal heat sinks dissipate the led heat and assure low Tj and reliable long life. Perfect for energy rebates with retrofit lighting applications!

DIMENSIONS

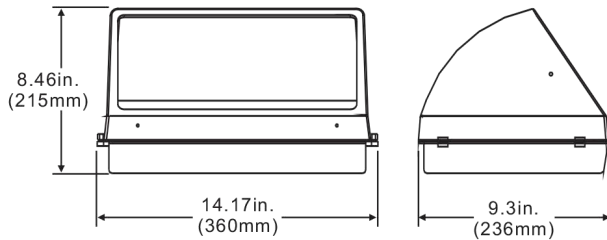

DISTRIBUTION

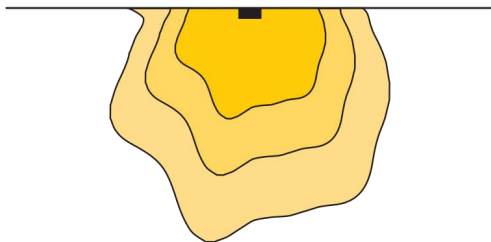

TECHNICAL SPECIFICATIONS

- Die cast housing
- Architectural bronze UV resistant powder coat finish
- UL listed / CUL listed
- Input voltage: 120~277V AC
- Highest quality long life LEDs
- Low Tj for long life, low lumen depreciation
- Lumens per LED — approx. 90~95
- Low starting temp -30°C
- Color temperature — 4700K
- IC current controlled LED circuits

LINE DRAWING

